



## ShenZhen ITCF technology Co., Ltd

Add: 3rd floor, C building, Fu Wen Industry Park, Busha Road, BuJi, shenzhen, CHINA

Tel: 86-755-82207646


Mobile Phone: 86-13266540012

Email: [salesmanager@ismade.com](mailto:salesmanager@ismade.com)

[www.itcfpos.com](http://www.itcfpos.com)

### Features

- Easy access OS to proceed maintainance
- Flexible configuration available
- Durable and stable metal base

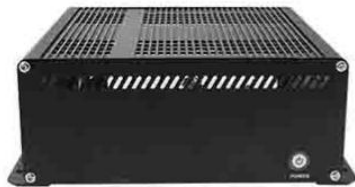

# ITCF-PB15T-i5

| Motherboard                       |                                                         |
|-----------------------------------|---------------------------------------------------------|
| CPU                               | Intel 6 <sup>th</sup> generation I5 series CPU          |
| chipset                           | CPU Integrated                                          |
| System Memory                     | 1* SO-DIMM DDR3 1333/1600 8GB                           |
| Storage                           | 1*SATAII 64G SSD                                        |
| LAN                               | On board RealTek 8111F 10/100/1000M lan card integrated |
| Audio                             | RealTek ALC662 HD audio decode support line out, MIC in |
| 17 touch screen monitor           |                                                         |
| LCD size                          | 15"                                                     |
| Touch screen                      | 5-wire resisitive touch screen,USB interface            |
| Resolution                        | XGA 1024*768                                            |
| Brightness                        | 300cd /m <sup>2</sup>                                   |
| Response                          | 8ms                                                     |
| Tilting Angle                     | 0-90 degrees                                            |
| External I/O ports                |                                                         |
| DC port                           | 1*12V/5A DC input for pos power source                  |
| HDMI                              | 1*HDMI for HD display                                   |
| VGA                               | 1*DB15 VGA connector to display monitor                 |
| USB                               | 4 *USB 2.0 (6usb needle inside)                         |
| Ethernet                          | 1*RJ45 10/100/1000Mbps                                  |
| Audio                             | 1*line out 1*Mic in                                     |
| Serial ports                      | 2*com port available at least                           |
| Environmental                     |                                                         |
| Relative Humidity                 | 20 % ~80 % Non-condensing                               |
| Operating Temperature             | 0°C to 40°C                                             |
| Electrical(external power adptor) |                                                         |
| input                             | 100V-240V,50-60HZ 1.5A                                  |
| output                            | DC 12V/5A for PC box                                    |
| input                             | 100V-240V,50-60HZ 1.5A                                  |
| output                            | DC 12V/3A for touch monitor                             |